



CT-2 Kiosk



CT-2



CT-SL

Consumer Terminal Solutions

NORITSU
DIGITAL INNOVATIONS AND CREATIVE SOLUTIONS



CT-2 Kiosk



The Noritsu CT-2 Kiosk is a complete, print-on-demand photo kiosk system. Using the powerful CT-2 Consumer Terminal platform, the system comes with an attractive and durable enclosure cabinet and utilizes a high-quality dye-sublimation printer that can produce prints in about 8 seconds.

Even first-time users will appreciate the easy touch-screen menus, which facilitate easy navigation and smooth operation. The CT-2 Kiosk accepts some of today's most popular storage media including CompactFlash, SmartMedia, Memory Stick, CD-R/RW, SD Card, USB Flash Drive and xD-Picture Card formats. Camera phones are also supported via Infrared and optional Bluetooth wireless input. The unit can also save finished images to CD-R/RW disks for easy archiving.

- Efficient-sized, small footprint kiosk enclosure.
- Responsive 15" touch screen monitor with angle adjustment.
- Thermal receipt printer.
- Optional on-demand printing capability with a high speed dye-sublimation printer.
- Can provide a 4" x 6" print in just 8 seconds.
- Kodak® DLS connectivity.*
- Pre-installed kiosk software included, upgradeable to CT-X.



CT-X: Next Generation Kiosk Software

CT-X Photo Kiosk Software enables your customers to make specialty prints they can modify themselves. CT-X provides powerful capabilities with an easy-to-use interface that is customizable to meet the needs of retail photofinishing environments.

CT-2

The Noritsu CT-2 is a versatile, consumer-friendly digital input terminal that fits well into any retail environment. The CT-2 can be deployed as a countertop order taking device or a stand-alone, print-on-demand kiosk (CT-2 Kiosk).

CT-2 units are an excellent complement to dDP Series Digital Dry Printers or QSS Series Digital minilabs, enabling retailers to implement a complete self-service photofinishing solution. Available in standard software configuration or with optional CT-X Photo Kiosk Software, these full-featured units are designed for fast transaction times and ease of use.




- Responsive 15" touch-screen monitor with tilt adjustment.
- Workflow supports specialty prints.
- Thermal receipt printer.
- Kodak® DLS connectivity.*
- Noritsu d-Storage II connectivity for previewing and printing.
- Accepts most digital camera media.
- Built-in wireless support (Infrared and optional Bluetooth).
- Pre-installed kiosk software included, upgradeable to CT-X.

- CT-X software features include built-in automatic red eye removal, filters, color correction, zoom and crop.
- Quickly print multiple greeting cards and other specialty items.

- Photos are quickly cropped.
- Scrapbook templates and other specialty items with cropping capabilities.

*DLS not compatible with CT-X

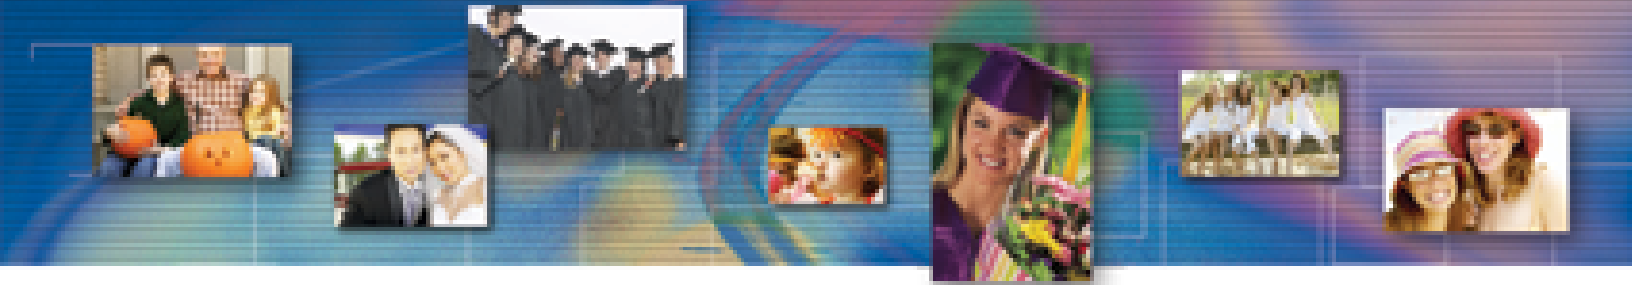

CT-SL

The Noritsu CT-SL is an entry level consumer terminal that improves efficiency by providing simple and easy to use input options. The customer is always in control of their media, eliminating the potential of lost or damaged media. Excellent for countertop only applications.

The CT-SL supports all popular media, and with the optional Template Creation Software you can print calendars, package prints, greeting cards, business cards, albums and multi-frame prints through your dDP or QSS Digital minilab.




- Responsive 15" LCD touch screen with angle adjustment.
- Customer self-service means improved efficiency for digital media orders.
- Supports all popular media formats.
- Thermal receipt printer.
- Kodak DLS support.*
- Workflow supports specialty prints.
- Flatbed scanner support (scanner not included).
- Built-in wireless support (Bluetooth).
- Pre-installed CT-X software included.

verted to full-sized calendars.

allow for a variety of sizes and


The CT-2 Kiosk, the CT-2 and the CT-SL provide superior reliability and efficiency to meet the demands of today's retail photo kiosk environments. The CT series of Consumer Terminals is a part of a complete line of digital imaging products available from Noritsu. We are one of the largest manufacturers of photo processing and digital imaging systems in the world. For over 50 years, Noritsu has continued to lead the industry in developing innovative hardware and software solutions.

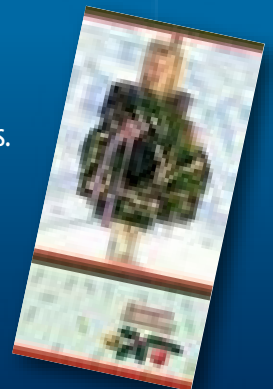



Overview

With Noritsu Consumer Terminals, your customers will enjoy a fast, easy-to-use order placement experience. All Noritsu Consumer Terminals interface with QSS Digital Minilabs, dDP Series, and IP-64 printers. The remarkable results: beautiful prints in a variety of styles and media writing across a range of platforms.

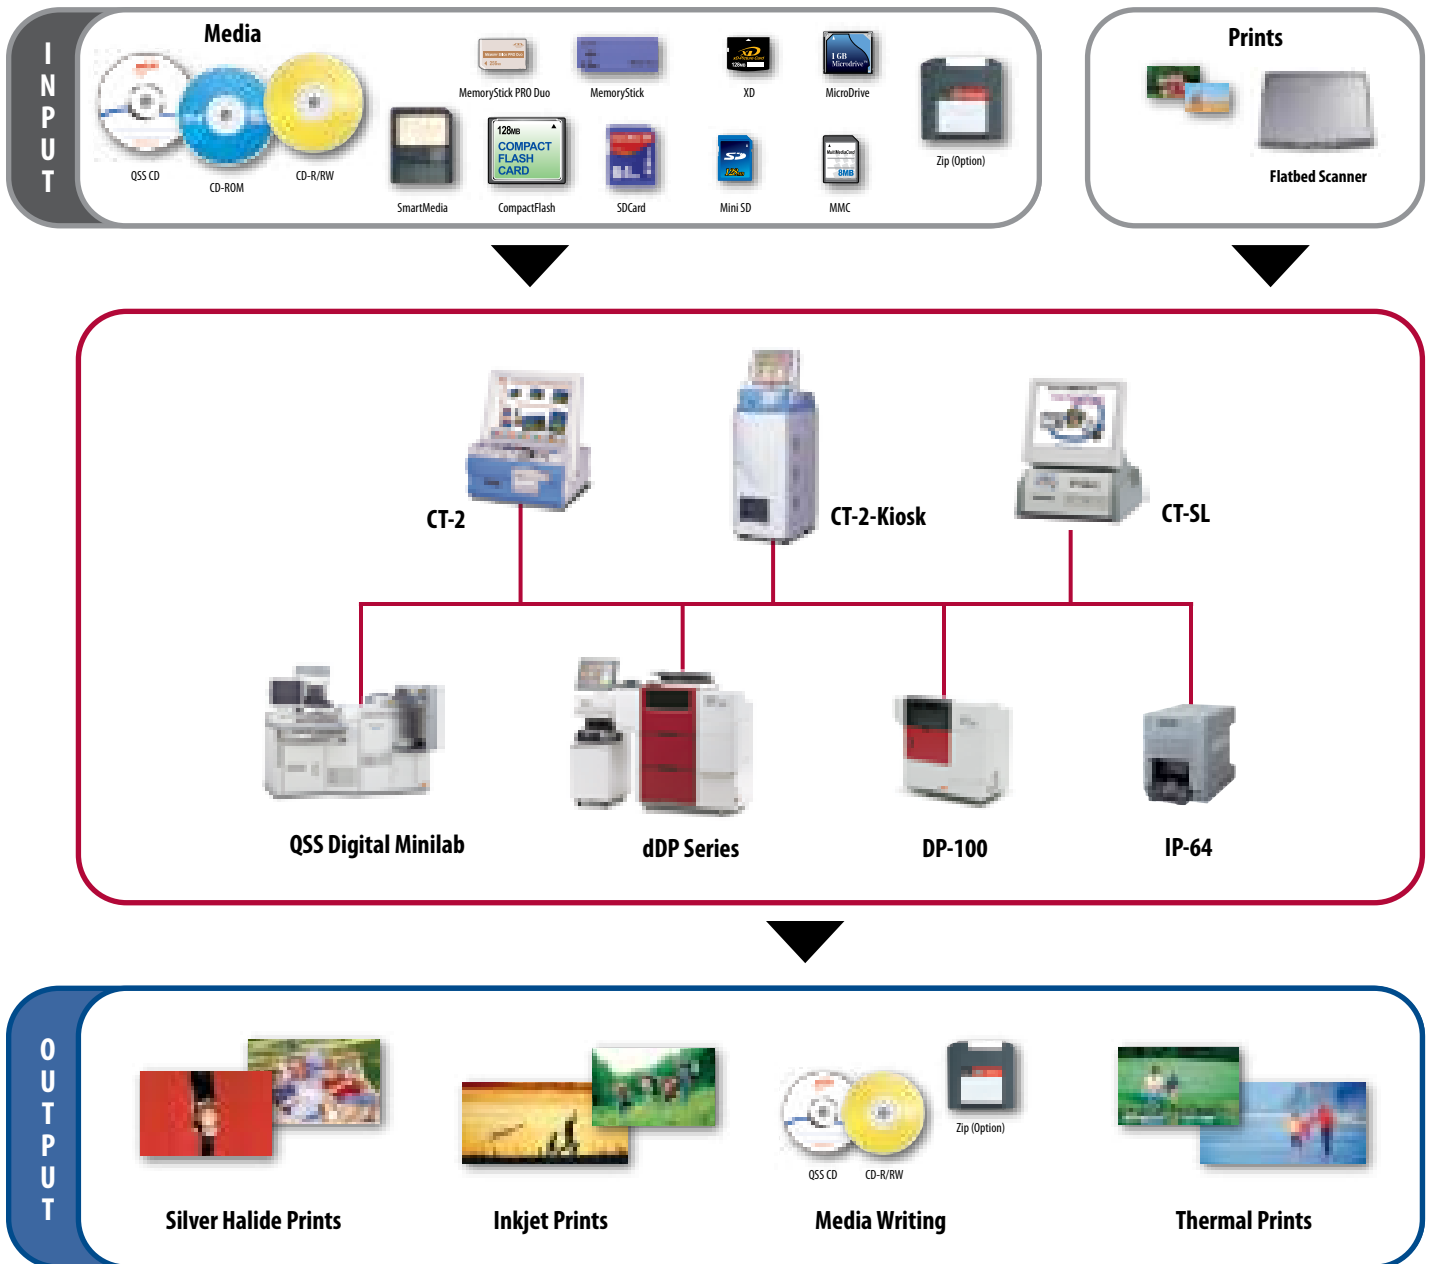

FEATURES	CT-2 KIOSK	CT-2	CT-SL
----------	------------	------	-------

Compatible Printers	QSS-30, QSS-31, QSS-32, QSS-33 & QSS-34 Series. (all QSS models excluding DLS™ models), MP-1600 Stand Alone Printer, dDP-411, 421 & 621 Digital Dry Printers, and the IP-64.		
Display Monitor	15" Touch Screen Monitor		
Input Media	Standard: CompactFlash, MicroDrive, SmartMedia, Memory Stick/PRO, Memory Stick DUO/PRO DUO, CD-R/RW, SD Card, MiniSD Card, MultiMediaCard, xD-Picture Card, PC Card, USB Flash Memory, IrDA	Same as CT-2 excluding IrDA. Built in Bluetooth connectivity.	
Input Image Formats	BMP, JPEG, TIFF (uncompressed RGB), Exif (2.1), PSD		
Output Media	CD-R/RW, Zip-Optional		
Output Media Format	BMP, JPEG, TIFF (uncompressed RGB)	Requires connection to QSS or dDP	
Estimated Print Speed	4"x 6" approx. 8 seconds/print 5"x 7" approx. 15 seconds/print 6"x 8" approx. 20 seconds/print	N/A	N/A
Power Requirements	AC100-120V, AC200-240V		AC100-240V IP2W
Rate Power Capacity	Standard: 2.0A 100-120V/1.0A 200-240V CT-2MD + CT-BOX: 12A 100V/ 10A 120V/ 6A 200-240V	Standard: 2.0A 100V/1.6A 120V/ 1.0A 200-240V	AC100-120V 4.0A AC200-240V 2.0A
Power Consumption	200W or less (Standard Specifications)	180 W (Standard Specifications)	84W (Standard Specifications)
Dimensions	CT-2MD + CT-BOX: 16" (L) x 22" (W) x 55" (H)	CT-2MD: 15" (L) x 15" (W) x 18" (H)	CT-SL: 17" (L) x 15.5" (W) x 19" (H)
Weight	CT-2MD: 38.5 lbs. CT-BOX: 151 lbs. Color Printer: 33 lbs.	CT-2MD: 38.5 lbs.	CT-SL: 46.5 lbs

Specifications are subject to change without notice. QSS is a registered trademark of Noritsu.
DLS is a registered trademark of Eastman Kodak Corp.

• **Noritsu America Corporation:** 6900 Noritsu Avenue, Buena Park, California 90620-1372 • **Western Regional Office:** 6950 Noritsu Avenue, Buena Park, California 90620-1311 • **Eastern Regional Office:** 336 Route 46 East, Fairfield, New Jersey 07004-2429 • **Midwest Regional Office:** 755 Tollgate Road, Elgin, Illinois 60123-9301 • **Southern Regional Office:** 2989 North Stemmons Freeway, Dallas, Texas 75247-6193 • **Latin America Regional Office:** 1800 N. Commerce Parkway, Suite 2, Weston, Florida 33326 • **Government Sales Office:** 8000 Towers Crescent Drive, Suite 1350, Tysons Corner, Virginia 22182-2700 • **Subsidiary; Noritsu Canada Ltd.:** 2680 Argenta Road, Mississauga, Ontario, Canada, L5N 5V4 • **Subsidiary; Noritsu de México S.A. de C.V.:** Plaza Mayorazgo de Luyando No. 7, Col.Xoco, Delegación Benito Juárez, C.P. 03330 México, D.F.