
S-2600SA


STAND ALONE SCANNER

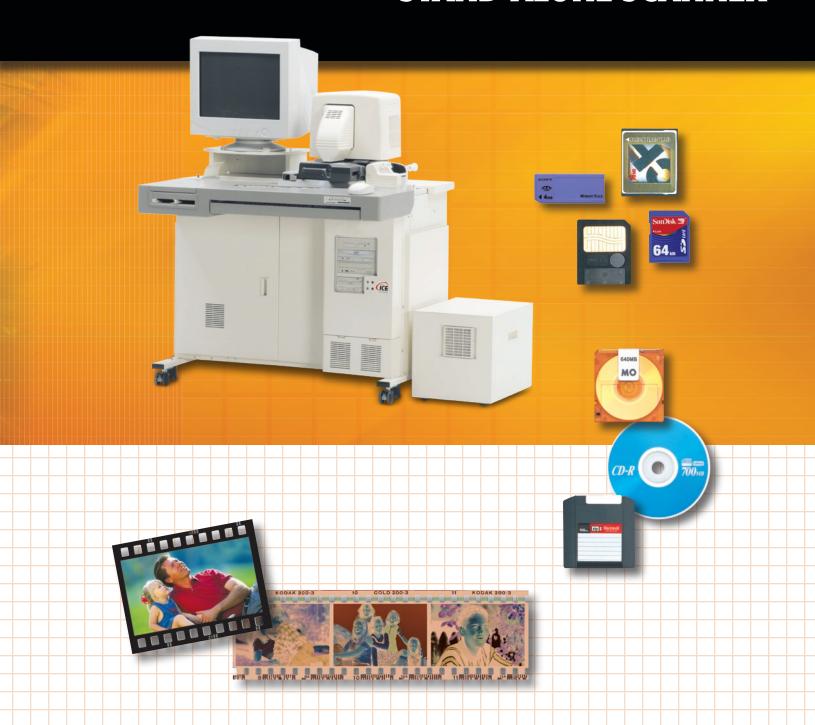

A HIGH SPEED/STAND ALONE SCANNER FOR A WIDE VARIETY OF FILM AND MEDIA FORMATS

NORITSU

S-2600SA Stand Alone Scanner

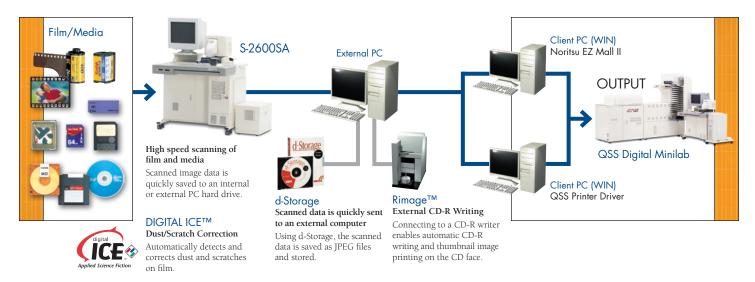

S-2600SA	SPECIFICATIONS
LIGHT SOURCE OF SCANNER:	HALOGEN LAMP
FILM SIZE:	110, 135F, 135H, 135P, 135HD, IX240 (C,H,P), 120 (6x4.5, 6x6, 6x7, 6x8, 6x9)
FILM TYPES:	COLOR NEGATIVE AND POSITIVE (INCLUDING MOUNTED) B&W NEGATIVE, SEPIA NEGATIVE
FILM CARRIER:	Standard: 135/240 AFC: Compatible with both 135 and IX240 film.
	Lane changes performed manually.
	OPTIONAL: 120 AFC: FILM CARRIER FOR 120 FILM. MINIMUM FILM LENGTH: 1 FRAME.
	110 AFC: FILM CARRIER FOR 110 FILM. COMPATIBLE WITH NEGATIVES ONLY.
	135/240 MMC: Carrier for mounted 135 and IX240 film.
	135/240 AMC: Carrier for mounted 135 and IX240 film.
	MFC: Attachments for each film size are set in the MFC to enable multiple
	FILM SUPPORT.
Compatible Input Media:	STANDARD: FLOPPY DISK, CD-ROM, CD-R/RW, PC CARD, COMPACTFLASH, SMARTMEDIA,
	Memory Stick, SD Card, MMC, Microdrive, xD-Picture Card
	(Adapter required)
	OPTIONAL: MO, ZIP, DVD-RAM, DVD-R, DVD-ROM, PRINTS (FROM FLATBED SCANNER)
Compatible Output Media:	STANDARD: FLOPPY DISK, PC CARD, COMPACTFLASH, SMARTMEDIA, MEMORY STICK,
	SD CARD, MMC, MICRODRIVE, xD-PICTURE CARD (ADAPTER REQUIRED)
	OPTIONAL: CD-R, CD-R/RW, MO, ZIP, DVD-RAM
Weight:	S-2600SA: 451.3 LBS. ±6.6 LBS.
	CONTROL UNIT FOR S-2600SA: 37.5 LBS
IMAGE ENHANCEMENT:	DIGITAL ICE

ESTIMATED PROCESSING CAPACITY*				
Outputting to S-2600SA System HDD (135F)				
Output Image Size	Scanning Resolution (pixels/image)	Capacity (frames/hr)		
4 Base	1287 x 1940	Approx. 913		
	2982 x 4497	Approx. 373		
16 Base	1287 x 1940	Approx. 221		
	2982 x 4497	Approx. 153		


ESTIMATED PROCESSING CAPACITY*				
Outputting to HDD of External PC for d-Storage (135F)				
Output Image Size	Scanning Resolution (pixels/image)	Capacity (frames/hr)		
4 Base	1287 x 1940	Approx. 2683		
	2982 x 4497	Approx. 997		
16 Base	1287 x 1940	Approx. 1259		
	2982 x 4497	Approx. 792		

*Calculated according to our criteria. The actual capacity you achieve may be different. Specifications are subject to change without notice.

Digital Ice is a trademark of Kodak. Rimage is a trademark of Rimage Corporation.

External View

Space Required For Installation

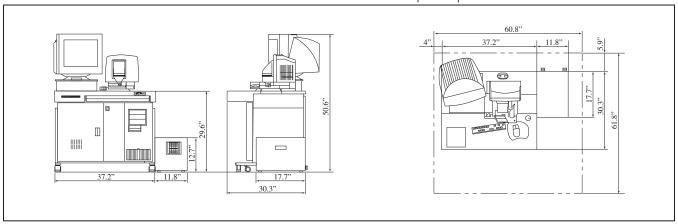

• Noritsu America Corporation: 6900 Noritsu Avenue, Buena Park, California 90620-1312 (714) 521-9040 • Western Regional Office: 6950 Noritsu Avenue, Buena Park, California 90620-1311 (714) 521-9040 • Western Regional Office: 6950 Noritsu Avenue, Buena Park, California 90620-1311 (714) 521-9040 • Eastern Regional Office: 356 Route 46 East, Fairfield, New Jersey 07004-2429 (973) 808-9898 • Midwest Regional Office: 755 Tollgate Road, Elgin, Illinois 60123-9301 (847) 888-8000 • Southern Regional Office: 2989 North Stemmons Freeway, Dallas, Texas 75247-6193 (214) 631-2400 • Latin America Regional Office: 1800 N. Commerce Parkway, Suite 2, Weston, Florida 33326 (954) 385-3775 • Government Sales Office: 8000 Towers Crescent Drive, Suite 1350, Tysons Corner, Virginia 22182-2700 (703) 821-0007 • Subsidiary; Noritsu Canada Ld.: 2680 Argentia Road, Mississauga, Ontario, Canada, LSN 5V4 (905) 567-8982 • Subsidiary; Noritsu de México S.A. de C.V.: Plaza Mayorazgo de Luyando No. 7, Col. Xoco, Delegación Benito Juárez, C.P. 03330 México, D.F. (52) 5-601-0429



