




Colette Pro Film Processors

A big processor...
...in a small package

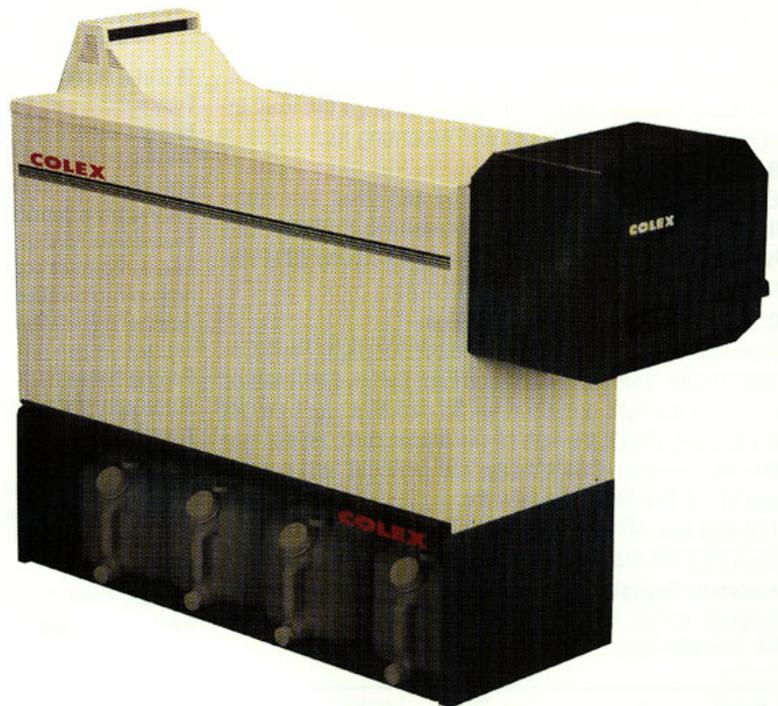

Professional grade design and construction

Compact size and low tank volumes

Microprocessor control

Automatic Replenishment System

Integral dryer

Automatic Daylight Operation with "autocut" for 35mm film

Roll and sheet film capability up to 8x10"

Rolls per hour 135-36 exp: E6=18, C41=27, B&W=30

Available in three configurations

A. Darkroom installation:

Standard machine is configured for "through the wall" installation using the included Wall Mounting Kit.

B. Manual Daylight Feed:

Enables the user to handle roll film and sheet film in the lighttight loading box on the processor in daylight. Film handling is performed by using the attached Daylight Feed sleeves.

C. Automatic Daylight Feed Operation:

Now available the optional Automatic Daylight Feed Operation with "autocut" End of Roll Film Cutter. This enables complete daylight operation for 35 mm film. Just extract the tongue, attach the film to the leader card, feed it into the processor and walk away. The "autocut" will cut the end of the film from the cassette.

120/220 and APS film requires Film Kits sold separately. Daylight Feed Sleeves option necessary for sheet films.

Automatic Daylight Feed System Options:

Tongue Extractor, Film Prep Station, APS Film Kit, 120/220 Film Kit, Tri-leader tabs

Roller Transport Features

Modular Rack System:

Fully submerged roller design

Heavy duty rollers

Washing crossover

Low chemical utilization

Heavy duty sideplates

Sealed tank concept

Microprocessor control:

Activates processor automatically

Automatically shuts down when processing cycle in complete

Precise temperature control

Automatic REplenishment

Wash water saver

Standard features:

Stand, Feed Box, Feed trays for 35mm &

120/220 films, Wall Mounting Kit and

Replenishment Tanks

Options:

Daylight Feed sleeves, Battery Backup System,

Roll Feed & Roll Take-up

Model CPF	Transport Speed	Dev. Tank Capacity	Length	Width	Power in KVA	Rolls/Hour Capacity (35mm/36exp.)	4x5" Sheets/hour	8x10" Sheets/hour
E-6	6 ipm/15cpm	3.2g/12 L	70"/1780mm	19.5"/495mm	3.0	18	65	30
C41	9 ipm/23cpm	2.4g/9 L	50"/1270mm	19.5"/495mm	2.5	27	100	48
C41NP	9 ipm/23cpm	2.4g/9 L	50"/1270mm	19.5"/495mm	3.0	27	100	48
B&W	10ipm/25cpm	1.5g/5.5 L	50"/1270mm	19.5"/495mm	3.0	27	100	54

Note:

1. Processors operate on 1Ø 220VAC +/- 10%.
2. Maximum Feed Width is 8"/203mm.
3. Long Roll length limited to 50 feet/15.25 meters (Max.)
4. Processors roll feed capabilities: 3 lanes 35mm, 2 lanes 120 film.
5. B&W Transport Speed based on a 2 minute Developer time.

specifications subject to change without notice.

Models available:

E-6, B&W, C-41 and C-41NP film processors in 20cm (8") widths.



[Request a hard copy](#)



contact@colex.com [about Colex](#) [Coxlex Home Page](#)

©1998 **Colex Imaging Inc.** All rights reserved.

347 Evelyn Street,

Paramus, NJ 07652, USA

Tel: 201-265-5670, Fax: 201-265-7093