



Colex CPK 32-25DP Compact Digital Ready RA4 Processor



If you have or are acquiring a Durst Epsilon, ZBE Chromira or Kodak Pegasus you need to know that the


DP series is the only range of processors specifically designed for the digital output that these paper writers generate.

Digital Ready Features:

- Oversized Developer Tank and Enhanced Replenishment System for Process Stability
- Powerful Recirculation System with External Filtration for Process Uniformity
- Built-in Take-up for easy handling of large rolls
- Infrared Dryer Assist
- 32" Feed Width and 25 ipm Transport Speed
- Seven Day Timer

CPK 32-25 DP	
Transport Speed for Paper in inches per minute	25
Transport Speed for Display Trans. in inches per minute	10.4
Dry to Dry Time for Paper in minutes	5
Dry to Dry Time for Display Trans. in minutes	12
Developer Tank Capacity in gallons/liters	5.0/19
Bleach/Fix Tank Capacity in gallons/liters	3.0/11.3
Wash Tank Capacity (per tank) in gallons/liters	3.0/11.3
Wash Water Flow Rate in gallons per minute/(Lpm)	1/3.8
Power Requirements (in KVA)*	6.5

*To calculate amperage @ 220 VAC use the formula $KVA \times 1000 \div VAC = \text{Amperage}$, i.e. $6.5 \times 1,000 \div 220 = 29.5 \text{ AMPS}$.

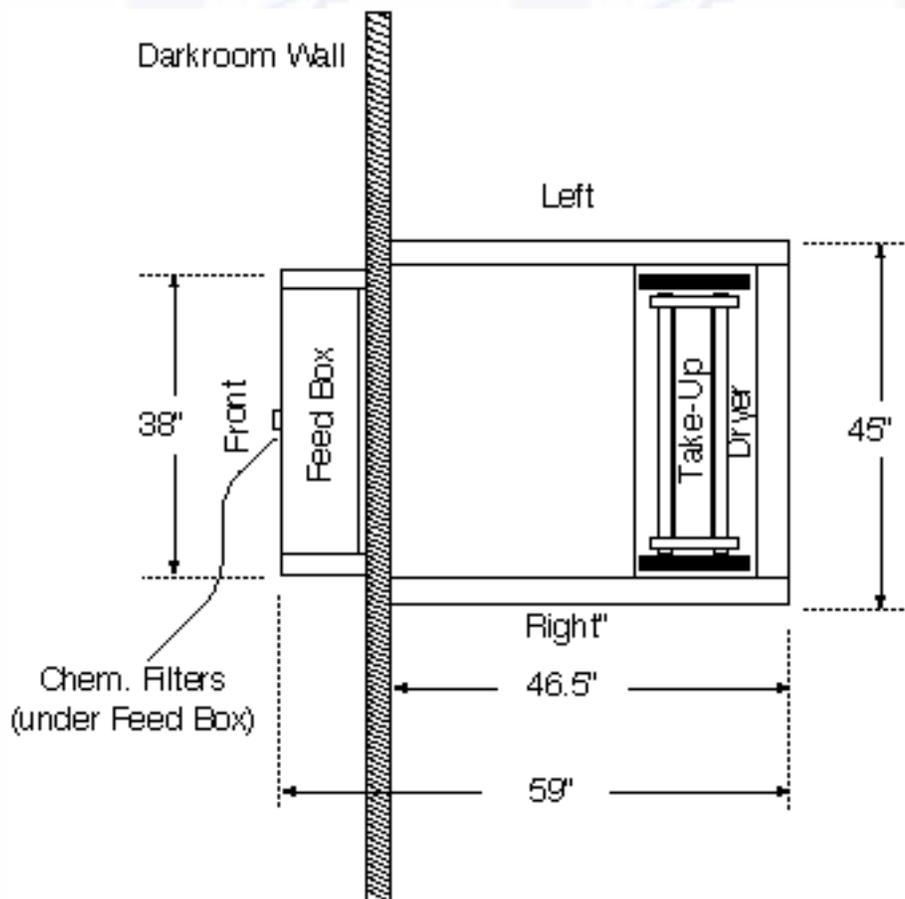


Cut sheet material exits on top of processor.

Roll material can be curved over the top of the dryer to the take up.

Two pairs of "Heavy Duty" Take-up spools are supplied for the roll feed and take-up.

Rack Carrier Tray included.

Note: Maximum roll length 250 feet (75 meters).

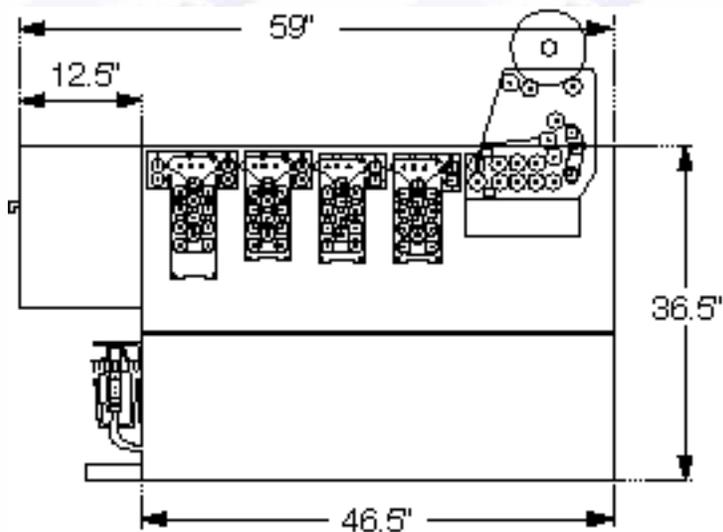

Specifications are subject to change without notification.

v080100



contact@colex.com [About Colex](#) [Coxex Home Page](#)

© 1996 **Colex Imaging Inc.** All rights reserved.

347 Evelyn Street

Paramus, NJ 07652, USA

Tel: 201-265-5670, Fax: 201-265-7093